


QuickHub

The universal Mid Centering Device



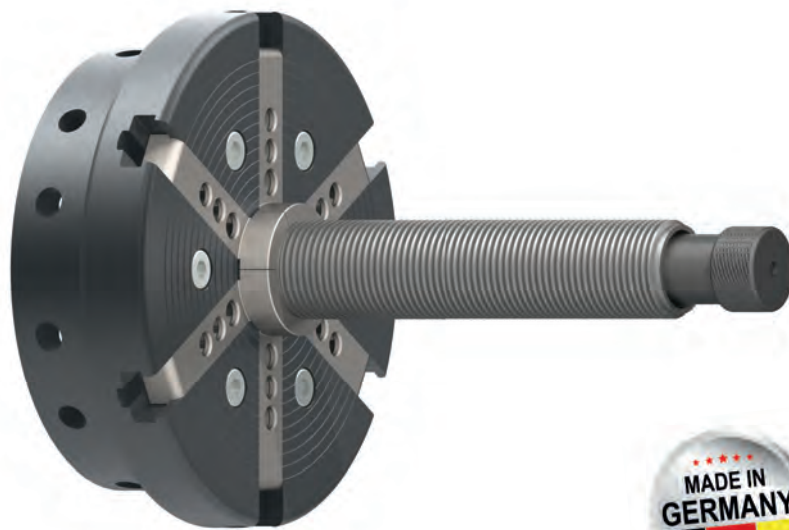

Product description

With our universal QuickHub centering is fully adjustable variable without high effort. The clamping range is between 53,5 - 171,5 mm* (* with additional attachments).


Wheels of cars, Off-Road 4x4 and light trucks can be efficiently and accurate centered with our QuickHub. No more searching for matching centering devices.




Application of the new QuickHub on a tire.

Product features

- Replaces all centering devices (for cars, Off-Road 4x4, light truck)
- fully adjustable variable centering from 53.5 mm - 171.5 mm* (*with additional attachments)
- For all common wheel balancers
- Time savings = no searching for matching centering devices
- no expenditure of energy required for centering
- faster than pneumatic or electro-mechanical clamping system
- Exact centering, tolerance free
- pre adjustment of hub diameter possible

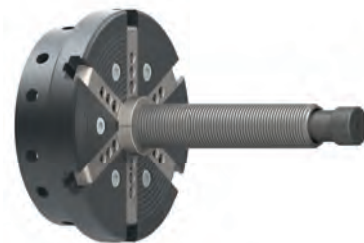

*QuickHub closed,
max. clamping range 53,5 mm
(without additional attachments).*

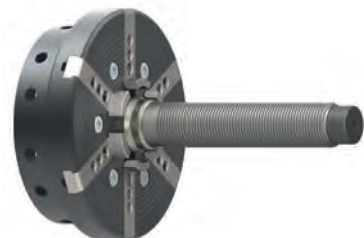

*QuickHub open,
max. clamping range 77,1 mm
(with additional attachments).*

4 additional attachments for larger clamping ranges

There are four versions of additional attachments available to expand the clamping range of the QuickHub. By quickly attaching the additional attachments, the clamping range increases up to 171.5 mm.

The two attachment sets with the clamping range 74.9 - 98.5 mm and 98.5 - 122.1 mm are included in the QuickHub.

The attachment sets with clamping range 123.5 - 147.1 mm and 147.9 - 171.5 mm are available optional. They fit for light truck wheels.


Additional attachments

(suitable for cars, Off-Road 4x4 and light trucks)

Clamping ranges from:


① **74,9 - 98,5 mm**

6 pcs./set, for cars and OffRoad

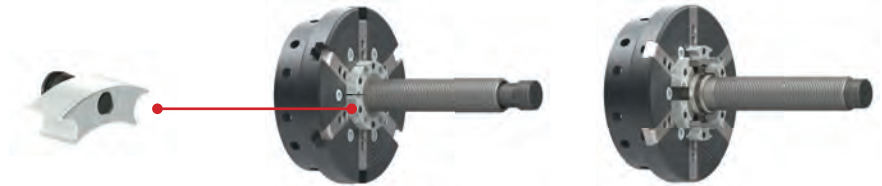


② **98,5 - 122,1 mm**

6 pcs./set, for cars and OffRoad

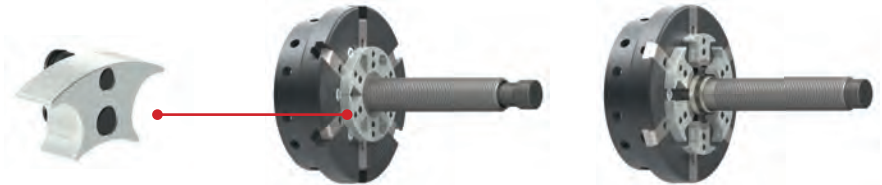


③ **123,5 - 147,1 mm**

6 pcs./set, for light trucks optional

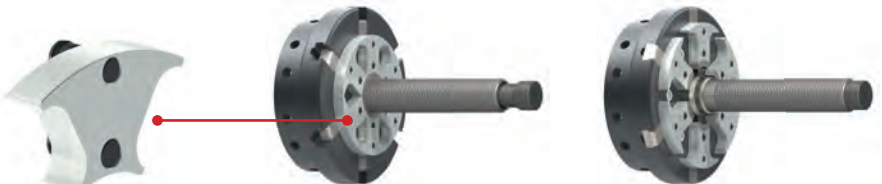

④ **147,9 - 171,5 mm**

6 pcs./set, for light trucks optional

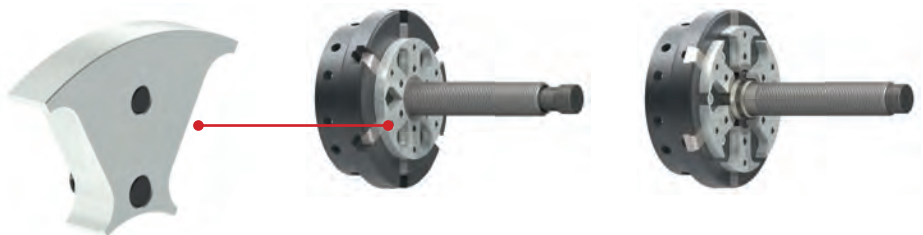


Application of the additional attachments on the QuickHub, minimum to maximum clamping range.

PRODUCT INFORMATION

Scope of delivery

1 QuickHub, 1 SoftGrip und 2 sets of additional attachments (6 pcs./set) clamping ranges: 74,9 - 98,5 mm and 98,5 - 122,1 mm



QuickHub



SoftGrip



Additional attachments
(each 6x)

Part No.: 105 xxx 004

(for cylindrical connections)

xxx = balancing machine type

447 = Bright

589 = Cemb ø40 / Hofmann Megaplan / TipTop (PN)

618 = Hunter GSP

627 = RAV / Butler / Space

657 = Mondolfo

907 = Corghi ø40

957 = JBC, Hofmann



Part No.: 105 818 004

(for conical connections)



Part No.: 105 589 005

(for cylindrical connections)

Cemb / Hofmann Megaplan / TipTop Probalance



Optional accessories

Additional attachments (suitable for light trucks)

Clamping ranges from:

③ 123,5 - 147,1 mm (6 pcs./set)

Part No.: 100e008 037



④ 147,9 - 171,5 mm (6 pcs./set)

Part No.: 100e008 036

